

**1550 MM UNIVERSAL AUTOMATIC MONO
SYSTEM FOR PAPER TOILET / KITCHEN
TOWEL PRODUCTION MACHINE**




**Address: Çerkeşli OSB Mah. İmes
19.cad. No:6 Dilovası / KOCAELİ.**

Tel: +90 262 502 12 18

Fax: +90 262 502 12 19


E-mail: info@pointmakina.com.tr

www.pointmakina.com.tr

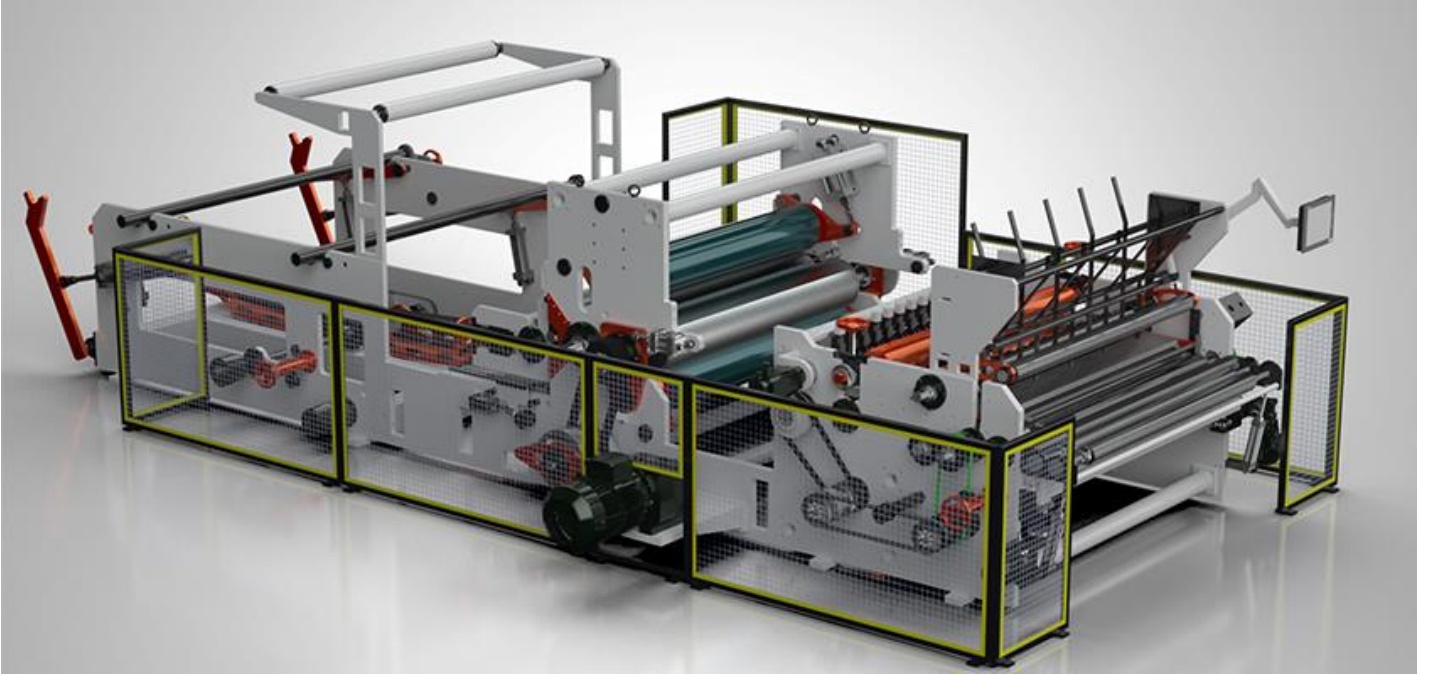

KITCHEN TOWEL	TOILET PAPER	INTERNAL DRAWN TOWEL	INDUSTRIEL TOWEL
			
MEGA TOWEL	EXAMINATION TABLE COVER	INTERNAL DRAWN MINI TOILET PAPER	INT.DRAWN MAXI T.P.
			
MAXI JUMBO TOILET PAPER		MINI JUMBO TOILET PAPER	
			

MACHINE VIEW

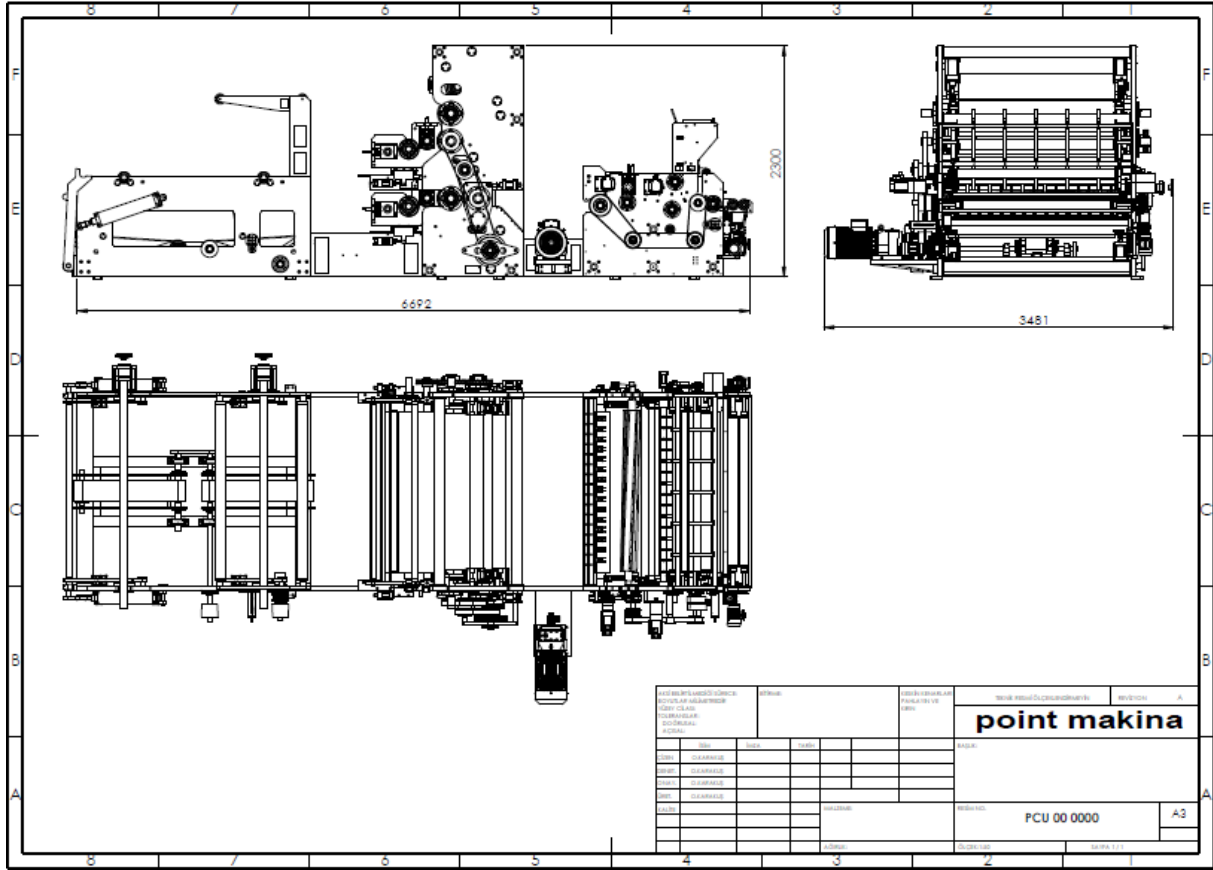

TECHNICAL SPECIFICATIONS

DESCRIPTION	TECHNICAL DETAILS
EMBOSSING UNIT	
UNIT TYPE	MONO SYSTEM
STEEL EMBOSSING DIMENSIONS	Ø270 X 1550 MM
RUBBER EMBOSSING DIMENSIONS	Ø250 X 1550 MM
EMBOSSING PRINTING SYSTEM	PNEUMATIC
EMBOSS PATTERNS	POINT TO POINT
QUICK CHANGE OVER SYSTEM	AVAILABLE
PAPER BREAK SENSOR	AVAILABLE
EMERGENCY STOP	AVAILABLE
CLEANING BRUSH	FOR ONE STEEL EMBOSSER
ANTISTATIC REMOVAL BAR	AVAILABLE
CENTRALIZED AUTO LUBRICATION	AVAILABLE
LAMINATION UNIT	1
LAMINATION UNIT	
LAMINATION UNIT CONTROL	ELECTRONIC
LAMINATION UNIT SYSTEM	TRAM ROLL (80 PIN / CM²) + DOCTOR BLADE
RUBBER LAMINATION DIMENSIONS	Ø200 X 1600
LAMINATION TRAM CYLINDER	Ø200 X 1600
LAMINATION CONTROL SYSTEM	ELECTRONIC
LAMINATION GLUE TANK	AVAILABLE
LAMINATION GLUE FILTER	AVAILABLE
GLUE APPLICATOR	1550 MM
LAMINATION CIRCULATING PUMP	AVAILABLE
BACK STAND UNIT	
MAX MOTHER ROLL DIAMETER	1300 MM
MAX MOTHER ROLL WIDTH	1550 MM
MAX MOTHER ROLL WEIGHT	1000 KG
NUMBER OF MOTHER ROLL	2
UNWINDING PALLETS	2 PALLETS FOR EACH BOBBIN
LEFT-RIGHT ADJUSTMENT TOLERANCE	+/- 50 MM
LEFT-RIGHT ADJUSTMENT CONTROL	AUTOMATIC
CORE DIAMETER	76 MM (152 MM WITH ADAPTER)
TENSION CONTROL	ELECTRONIC / DANSER
REEL END WARNING	YES
MOTHER ROLL LIFTING	HYDRAULIC
REQUIRED PNEUMATIC PRESSURE	8 bar
CENTRAL AUTOMATIC LUBRICATION	AVAILABLE
WINDING UNIT	
SLICING BLADE LOWER/UPPER	15 SETS
SEWING DEVICES	15 SETS
PAPER TENSION CONTROL	PNEUMATIC

WORKING SPEED	200 m/ MIN
FINAL PRODUCT DIAMETER	90 - 220 MM
PERFORATION UNITS	AVAILABLE
PERFORATION CONTROL	10 - 50 CM
PERFORATION CONTROL SYSTEM	SERVO CONTROL
PERFORATION MOVING KNIFE	4 KNIVES
PERFORATION FIXED KNIFE	2 VIBRATION KNIVES
CORE SUPPLY	AUTOMATIC/ PNEUMATIC
START-UP GLUEING	AVAILABLE
END GLUEING (TAIL SEALER)	AUTOMATIC
GLUE TANK FOR END GLUEING TAIL SEALER	YES
UP AND DOWN BLOWER	AUTOMATIC
PERFORATED BLADE LUBRICATION	WITH FELT
BANANA ROLL FOR RUBBER	AVAILABLE (ADJUSTABLE)
PRESSURE TANK	AVAILABLE
CENTRAL AUTOMATIC LUBRICATION	AVAILABLE
DRIVE SYSTEM	14 M BELT-PULLEY

GENERAL INFORMATION

AUTOMATION	LENZE
DATA CONTROL	WORKING HOURS, LOG COUNTER
TOTAL MOTOR POWER	19 KW
MOTORS ARE LOW ENERGY CONSUMPTION MODELS	(A + ENERGY)
OPERATING PRESSURE	8 BAR
WORKING CURRENT	380 V
WORKING FREQUENCY	50 HZ
REQUIRED AIR PRESSURE	150 L/M
SPEED CONTROL	DIGITAL

<u>MACHINE PRICE</u>	
<u>PAYMENT METHOD:</u>	ADVANCE PAYMENT
<u>DELIVERY TIME</u>	60 WORKING DAYS AFTER ADVANCE PAYMENT
<u>INSTALLATION</u>	TRANSPORTATION OF EQUIPMENT AT THE ACCOUNT OF THE BUYER COMPANY
<u>INSTALLATION AND TRAINING</u>	5 WORKING DAYS.
<u>WARRANTY AND TERMS</u>	2-YEAR WARRANTY