




# **BOTTOM SEALING BAG MAKING MACHINES WITH MULTI LINES SLIT-SEAL**

**DİP DİKİŞLİ SICAK DİLİMLEMELİ TORBA  
KESME MAKİNALARI**

## **FEATURES | ÖZELLİKLER**

- **BS-800 2L / BS-1100 2L:** There is One Slit-Seal Knife in Order to Produce 2 Line Bags.
- **BS-800 3L / BS-1100 3L:** There are Two Slit-Seal Knives in Order to Produce 3 Line Bags.
- **BS-800 4L / BS-1100 4L:** There are Three Slit-Seal Knives in Order to Produce 4 Line Bags.
- **BS-800 5L / BS-1100 5L:** There are Four Slit-Seal Knives in Order to Produce 5 Line Bags.
- 'Bottom Sealing Bag' and 'Blocked Bags (Calendar Bags)' can be Produced. Cold Cutting System.
- All Sacks are Stacked on Cold Pins Those are Located 1 cm Inside From the Open Side of the Sack.
- The Sack Packages are Arranged in A Row on the Conveyor. The Conveyor is Included to Machine As Standard.
- Servo Motor and Invertor Control System.
- Bag Length, Set Number can be Changed Via Screen. Bag Counting, Machine Speed can be Seen on the Screen.
- There is One Photocell. Ability to Produce Printed Bags and None-Printed Bags.
- Ability to Work With HDPE, LDPE and Recycled PE Materials.
- **BS-800 2L / BS-1100 2L:** Bir Sıcak Bıçak ile Dilimleme Yaparak 2 Hat Torba Üretir.
- **BS-800 3L / BS-1100 3L:** İki Sıcak Bıçak ile Dilimleme Yaparak 3 Hat Torba Üretir.
- **BS-800 4L / BS-1100 4L:** Üç Sıcak Bıçak ile Dilimleme Yaparak 4 Hat Torba Üretir.
- **BS-800 5L / BS-1100 5L:** Dört Sıcak Bıçak ile Dilimleme Yaparak 5 Hat Torba Üretir.
- Dip Dikişli Torba ve Blok Poşet (Perfore İşlemi Bu Makinada Yapılmaz) Üretimi Yapar.
- Soğuk Kesim Sistemli.
- Torbanın Açık Ucundan 1cm İçeriden Soğuk İğneye İstifler.
- Kesilen Torba Paketleri Konveyör Üzerine Dizilir.Konveyör Bandı Makine ile Standart Olarak Verilir.
- Servo Motor ve Invertör Sistemli.
- Poşet Boyu, Poşet Sayısı Ekrandan Değiştirilir. Poşet Adedi Sayımı, Makine Hızı Ekrandan İzlenebilir.
- 1 Adet Fotosel Bulunur. Baskılı ve Baskısız Poşet Keser.
- Yüksek Yoğunluk Polietilen (HDPE), Alçak Yoğunluk Polietilen (LDPE) ve 2. Kalite Polietilen Çalışabilir.

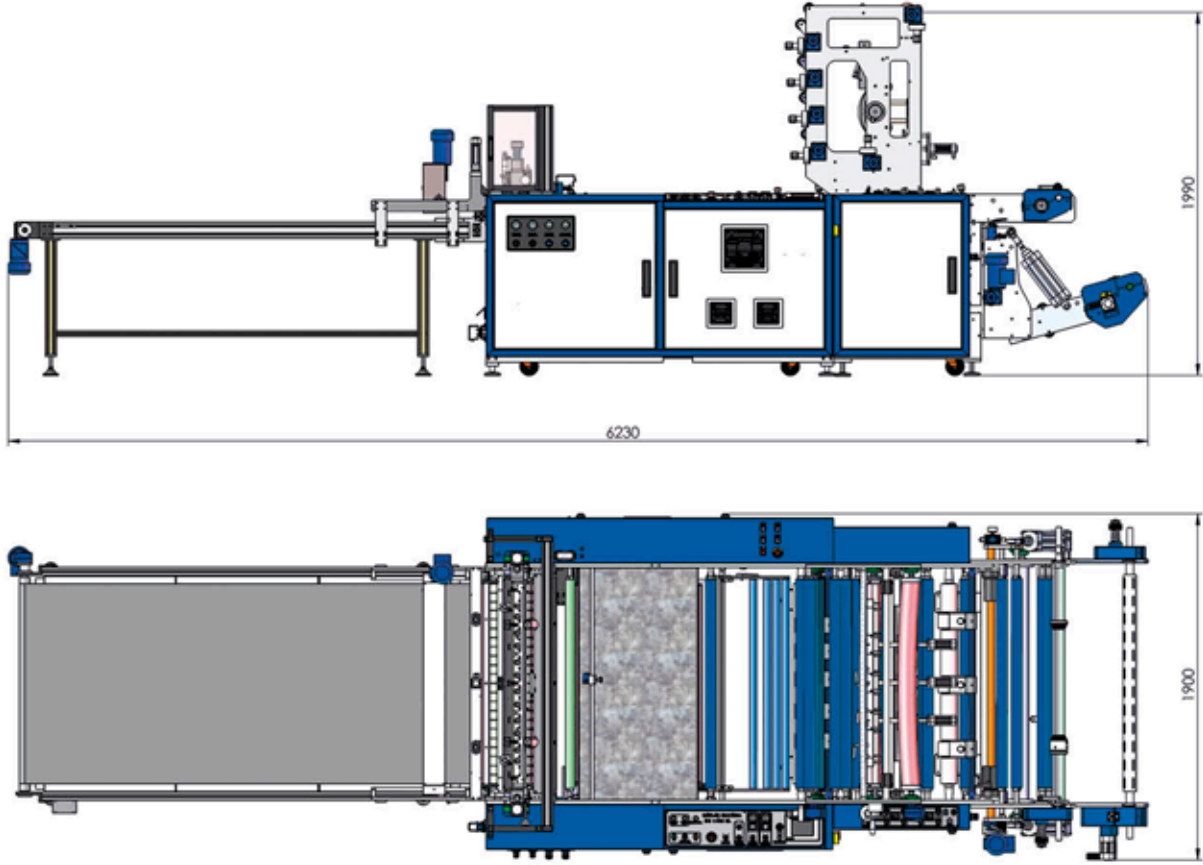


## BAG TYPES | POŞET TİPLERİ

## Standard | Standart



## Optional | Opsiyonel

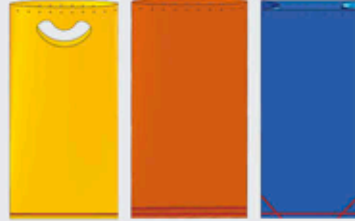

## TECHNICAL SPECIFICATIONS | TEKNİK ÖZELLİKLER

		BS-800 2L	BS-800 3L	BS-800 4L	BS-800 5L	BS-1100 2L	BS-1100 3L	BS-1100 4L	BS-1100 5L
Max. Bag Width (mm)	Maks. Poşet Genişliği (mm)	800	800	800	800	1100	1100	1100	1100
Bag Length (mm)	Poşet Boyu (mm)	130 - 3000							
Thickness of Film (mm)	Film Kalınlığı (mm)	0,006 - 0,150							
Total Thickness of Film (mm)	Toplam Film Kalınlığı (mm)	0,300	0,300	0,300	0,300	0,300	0,300	0,300	0,300
Max. Production Speed (pcs/minute)	Maks. Üretim Hızı (adet/dakika)	150	150	150	150	150	150	150	150
Total Air Consumption (liter/minute)	Toplam Hava Tüketimi (lt/dakika)	200	200	200	200	250	250	250	250
Total Installed Power (kW)	Toplam Güç (kW)	11	12	13	14	11	12	13	14