


ADVANCED TECHNOLOGY FOR A SIMPLIFIED WORKFLOW

| PRINCIPLE OF OPERATIONS

The analysis starts by weighing a sample inside a boat and subsequently running it through thermal decomposition under a flow of air or oxygen. All mercury and residual combustion products then flow into the catalyst section. Here, interferences are removed, and mercury residues are reduced and trapped in a gold amalgamator with subsequent release into two measuring cells positioned along the spectrophotometer's optical path. The ability of the catalyst to remove any interferences along with the fast release of mercury from the amalgamator ensures a precise and accurate determination. With the DMA-1 *evo*, you get the right results not only the first time, but every time.

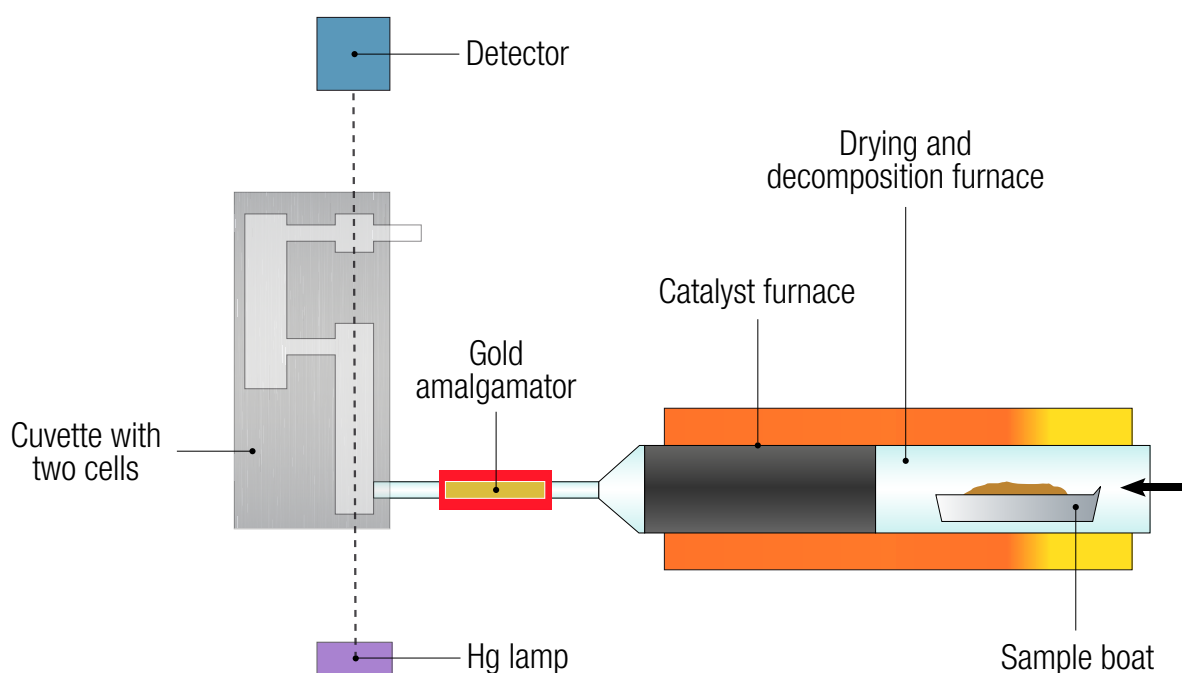

DMA-1 evo schematics

| GREENER ANALYSIS

The DMA-1 *evo* embraces the values of green chemistry enabling laboratories a more sustainable process. It avoids sample preparation, eliminating the use of concentrated acids, generating less wastes and reducing the energy consumption. In addition, the entire process runs under air flow, avoiding the use of other carrier gases.



AFFORDABLE TO GET ECONOMICAL TO RUN

I COST-EFFECTIVE ANALYSIS

DMA-1 *evo* offers an accessible path to mercury analysis with a limited initial investment, low running costs and less operator time. It enables laboratories to eliminate the costs related to acids (often ultrapure), digestion processes and wastes. DMA-1 *evo* frees up all the time typically dedicated to sample preparation, allowing the operator to accomplish other tasks.

I GO DIRECT ON ANY SAMPLE

DMA-1 *evo* has been seamlessly integrated into a wide range of applications. It is used for mercury determination in environmental applications, in compliance with US EPA method 7473, and in several other matrices such as fish, coal, biological and many others.

Sample	Concentration DMA-1 <i>evo</i> (mg/kg)	Certified (mg/kg)
NIST 1633b	0.142	0.14 ± 0.02
NIST 1633b	0.142	0.14 ± 0.02
NIST 1633b	0.139	0.14 ± 0.02
NIST 1633b	0.135	0.14 ± 0.02
NIST 1633b	0.140	0.14 ± 0.02


*NIST 1633b, Constituent Elements
in Coal Fly Ash Certified Material
RSD: 2.06% - Mean: 0.139 mg/Kg - SD: 0.028*

Sample	Concentration DMA-1 <i>evo</i> (mg/kg)	Certified (mg/kg)
BCR 277R	0.125	0.128 ± 0.017
BCR 277R	0.122	0.128 ± 0.017
BCR 277R	0.123	0.128 ± 0.017
BCR 277R	0.127	0.128 ± 0.017
BCR 277R	0.127	0.128 ± 0.017

*BCR 277R, Estuarine Sediment Certified Material
RSD: 1.83% - Mean: 0.124 mg/Kg - SD: 0.0023*



Environmental



Food/Fish



Power plant/Coal



Cement/Mining



Clinical/Biological



Petrochemical

ONE CALIBRATION FIT ALL

A single calibration, completed using liquids or CRMs, suits a large variety of samples for a wide concentration range. Moreover, calibration of the DMA-1 evo offers long-term reliability thanks to both the system's stability and the long working life of the catalyst tube and gold amalgamator.

Certified material	Certified (µg/kg)	DMA-1 evo (µg/kg)
BCR-150 Skim Milk Powder	7.7 - 11.1	9.2 ± 0.2
NIST 1630a Coal	93.8 ± 3.7	93.4 ± 2.4
GSD-10 Stream Sediment	280 ± 40	270 ± 15
BCR-422 Cod Muscle	543 - 575	558 ± 8

Results of various certified reference materials using the same calibration

ENHANCED SOFTWARE CAPABILITIES

The intuitive software, easyCONTROL, available on both the dedicated touchscreen terminal and on the PC, includes the most advanced features to simplify the analysis and its reporting: Auto-blank, LIMS connection, data handling, data import/export, and an audit trail in compliance with 21 CFR part 11. Moreover, the data reprocessing feature prevents the need to re-run a specific sample.

COMPACT AND PORTABLE

The DMA-1 evo is a compact standalone mercury analyzer with a minimal footprint which is further reduced through the integrated terminal. Its rugged design and easy setup make the DMA-1 evo an excellent solution for on-site testing and on mobile laboratories too.



Pos	Sample name	Amount	State	Height	Hg [µg]	[µg/Kg]	Cal Factor	Σ	Group
2	cl	1.0000g	✓	0.0001	0.0001	0.0001	0.9990		
3	cl	1.0000g	✓	0.0002	0.0004	0.0004	0.9990		
4	boat	1.0000g	✓	0.0298	0.0505	0.0505	0.9990		
5	boat	1.0000g	✓	0.0362	0.0614	0.0614	0.9990		
6	boat	1.0000g	✓	0.0257	0.0434	0.0434	0.9990		
7	boat	1.0000g	✓	0.0280	0.0474	0.0474	0.9990		
8	boat	1.0000g	✓	0.0526	0.0896	0.0896	0.9990		
1	DORM-3	0.0750g	✓	0.0251	28.0822	374.4287	1.0000		
2	DORM-3	0.0770g	✓	0.0263	29.4348	382.2704	1.0000		
3	DORM-3	0.0670g	✓	0.0226	25.2671	377.1208	1.0000		
4	DORM-3	0.0750g	✓	0.0249	27.8568	381.5999	1.0000		
5	DORM-3	0.0660g	✓	0.0224	25.0421	379.4252	1.0000		
6	DORM-3	0.0780g	✓	0.0269	30.1115	386.0449	1.0000		
7	DORM-3	0.0670g	✓	0.0244	27.2935	407.3661	1.0000		

m= 244.2604 µg/Kg
σ_{rel}= 189.1387 µg/Kg
σ_{rel}= 77.43 %

MILESTONE HELPING CHEMISTS
www.milestonesrl.com

Statistics on the DMA-1 evo software

SMALL FOOTPRINT FOR HIGH FLEXIBILITY