




■ RS-4400 ROLLER SHUTTER SIDE LOCKING MACHINE

PARAMETER	DATA
CYCLE TIME	240 Shutter curtains / 8 hours
MACHINE INPUTS	ALUMINIUM SLAT WITH FOAM (SIZE TO BE DEFINED) STAPLES (INOX TYPE IS ADVISED) SIDE LOCKS (RISUS MACHINES SIDE LOCKS ARE ADVISED)
CURTAIN WIDTH (W)	MIN : 580MM MAX : 4400MM
SLAT SIZE (A)	MIN : 37MM MAX: 55MM
EXTRA TOOLS FOR DIFFERENT SIZES (A)	MACHINE CAN BE USED WITH MAXIMUM 4 SLAT SIZES (VIA EXTRA TOOLS)
TOOL CHANGEOVER TIME BETWEEN DIFFERENT SLAT SIZES	2 MIN.

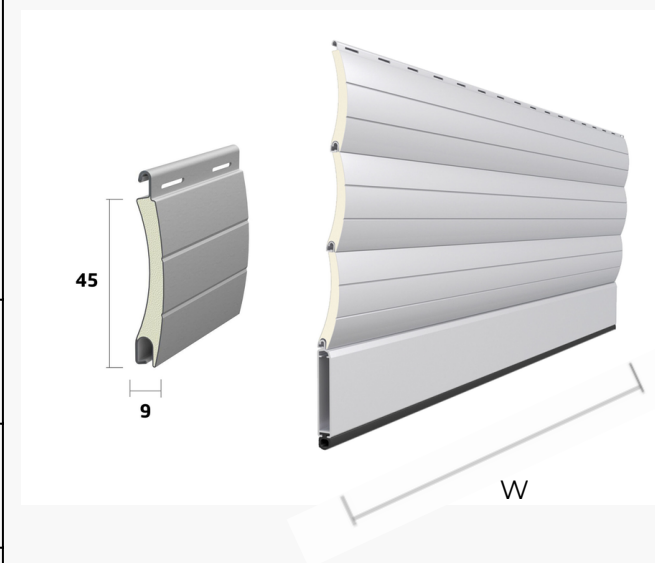

PARAMETER	DATA
AUTOMATION	SIEMENS
ELECTRICAL COMPONENTS	SCHNEIDER & SIEMENS
PNEUMATICS	SMC
ELECTROSTATIC POWDER PAINTING	RAL 6018 RAL 7032 RAL-7016 RAL 1028

PARAMETER	DATA
	380V 50/60HZ 3L-N-PE 2 KW
	6-8 BAR
	L= 5300MM W=1800MM H=2100MM
	NET WEIGHT : 880KG GROSS WEIGHT:885 KG

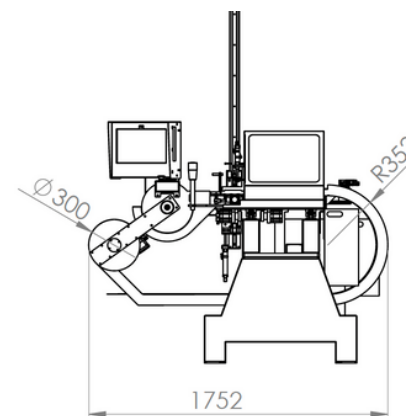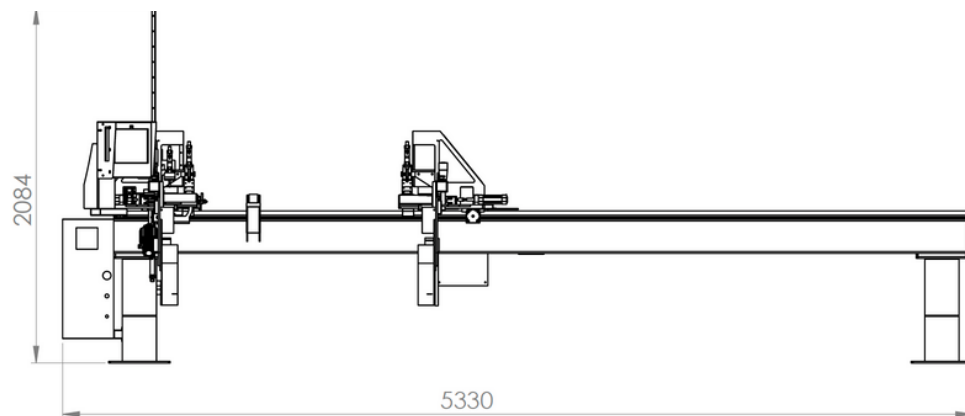

RS-4400 ROLLER SHUTTER SIDE LOCKING MACHINE



BUSINESS & PRODUCTIVITY PC ALL-IN-ONE
PRO 16T 10M
PRO 16T 10M-001XEU

Specification

Operating Systems	Operating Systems	N/A
Display	Screen Size	15.6" (40 cm)
	Active Display Area (mm)	344.132(H)x193.436(V)
	Curvature	Flat
	Panel Type	TN
	Resolution	1366x768 (HD)
	Pixel pitch	0.252(H)x0.252(V)
	Brightness (nits)	220
	Contrast Ratio	500:1
	Signal Frequency	31.84~48.24 KHz(H) / 40~60 Hz(V)
	Response Time (GTG)	10 ms
	View Angles	45°(H)/45°(V)
	Surface Treatment	Anti-Glare
	Touch Screen	Single Point Resistive Touch Screen
	Display Colors	262K
I/O Ports	Lock type	Kensington
Processor	CPU Number	Intel Celeron 5205U
	CPU Clock	1.9GHz
	CPU Cores	2
	Cache	2MB
Chipset	Threads	2
	Chipsets	N/A
Memory	Memory Size	4GB(4GB*1)
	Memory Type	DDR4 SDRAM
	Memory Speed	1333/2666(MHz)
	Module Type	SO-DIMM
	Memory Slot(Total)	2
	Memory Slot(Free)	1
	Max Capacity	Max 32GB
	SSD Interface	PCIe GEN3x4 NVMe
	SSD Form Factor	M.2-2280 M-KEY
	SSD Config	256GB*1
Storage	SSD Size	256GB
	HDD1 Interface	N/A
	HDD1 Form Factor	N/A
	HDD1 Size	N/A
	HDD1 RPM	N/A
	ODD1 Type	N/A
	ODD Height	N/A
	ODD Type	N/A
	M.2 slots(Total)	1
	M.2 slots(Free)	0
	2.5" Drive Bays(Total)	1
	2.5" Drive Bays (Free)	1
Communications	LAN	Realtek RTL8111H
	WLAN	INTEL 9462 NGWGNV
	WLAN Version	802.11ac 1x1+BT
	BT Version	5
Audio	Audio Chipset	Realtek ALC233
	Audio Type	7.1 Channel HD Audio
I/O Ports (Front)	USB 3.2 Gen 1 Type A	2
	USB 3.2 Gen 1 Type A (R)	2
	USB 2.0 Type A (R)	2
	RJ45	2
I/O Ports (Rear)	Card Reader	1
	VGA out	1
	COM Port	2
	Mic-in/Headphone-out combo (R)	1
	Printer Port (Parallel)	1



System I/O-Ports



1. 1x Card Reader
2. 2x USB 3.2 Gen 1 Type A
3. 1x DC-in
4. 1x Parallel Port (Printer Port)
5. 2x COM port
6. 1x VGA-out
7. 2x RJ45
8. 2x USB 2.0 Type A
9. 2x USB 3.2 Gen 1 Type A
10. 1x Line-out/Microphone-in